

# HOLDING CABINET AGF72.2

## MAIN FEATURES:

- AISI 304 stainless steel construction with external Scotch brite finish
- Monocoque structure with increased loading volume
- Foamed engine compartment sides for improved strength and soundproofing
- Sides with 85 mm insulation in high density expanded polyurethane (about 42 kg / m<sup>3</sup>) without HCFC
- Radiated interior to facilitate cleaning operations
- Self-closing and reversible doors (with kit)
- Door frame with heating element Easily replaceable
- Magnetic door gasket, replaceable without equipment
- Door hinges suitable for installation on plinth
- Feet in stainless steel adjustable in height

## SET-UP:

- Double pitch trayholders, every 35 and 60mm
- Standard equipment: 5 extractable trays on a pair of anti-tipper C guides
- Possibility to insert up to 48 shelves with 35mm pitch

## COOLING SYSTEM:

- LOW ENERGY CONSUMPTION: thanks to:
- R290 gas (HFC prepared)
- Special low consumption electronic fans
- High seal door gasket with low consumption frame heating
- 85 mm insulation
- Monobloc refrigeration unit
- Evaporator with anti-corrosion treatment in cataphoresis
- Climatic class 5 (ambient temperature 43°C)
- Automatic hot gas defrost for a shorter and more efficient cycle
- Evaporation of condensation water with Water condensate dissipation system
- Automatic ventilations stop when opening the door
- Adjustment of the cell ventilation with multiple levels of speed and air volume.

## CONTROLS AND SAFETY DEVICES:

- 5 "capacitive touch screen display
- Internet ready/cloud/diagnosis and remote control
- IOT e Industry 4.0 ready
- Integrated network card with Ethernet output included (WIFI optional);

## OPTIONS / ACCESSORIES

- Wheel kit, 2 with brake
- Water cooling
- Additional guides



Stainless steel construction



ENERGY SAVING



Touch control panel HACCP




I O T




R290 GAS

Gas R290




Single-block refrigeration system




Insulation thickness 80 mm




Smart automatic defrosting system




5 extractable shelves on C shaped guides



Available with left or right door opening



Compensation valve



Round-air system

## HIBER ALI Srl a Socio Unico

Via Treviso, 4 · 33083 Taiedo di Chions · PN · I  
T +39 0438 911 940 · F +39 0438 911 991  
info@hiber.it · hiber.it

# HOLDING CABINET AGF72.2


SCHEDA TECNICA	AGF72.2
Temperature range 1	-30/-12
Dimensions (LxPxH) mm	790x915x2110
Depth with 90° door mm	1645
Door opening (WxH) mm	620x710
door opening 2 (WxH)	620x710
Internal depth mm	735
N° compartments	1
N° Half Doors	2
Internal setup	5 "C" shaped pair of guides and 5 trays 600x730
Refrigerant gas gas	R290
Gas quantity w air cooling g	150
Noise level dB(A)	<70
Refrigeration system ventilated air forced	ventilated airForced
COOLING POWER -30°C + 45°C EN12900 W	594
Climatic class	5
Energy class	D
Power supply V/~ /Hz	220/1/50
Electric cable n° x mm²	(2+1)x1,5mm2
Max Electric power - up to +10 W	895
Max. Current consumption - up to +10 A	4.32
EL. CONSUMPTION (ISO16825) [W24h] W	6.96
Defrosting	gas caldo
Packing dimensions, standard (WxDxH) mm	845x980x2200
Net weight kg	171
Gross weight in std package kg	206

## HIBER ALI Srl a Socio Unico





Via Treviso, 4 · 33083 Taiedo di Chions · PN · I  
T +39 0438 911 940 · F +39 0438 911 991  
info@hiber.it · hiber.it

# HOLDING CABINET AGF72.2

## ICE CABINET SELF CONTAINED DOUBLE DOORS

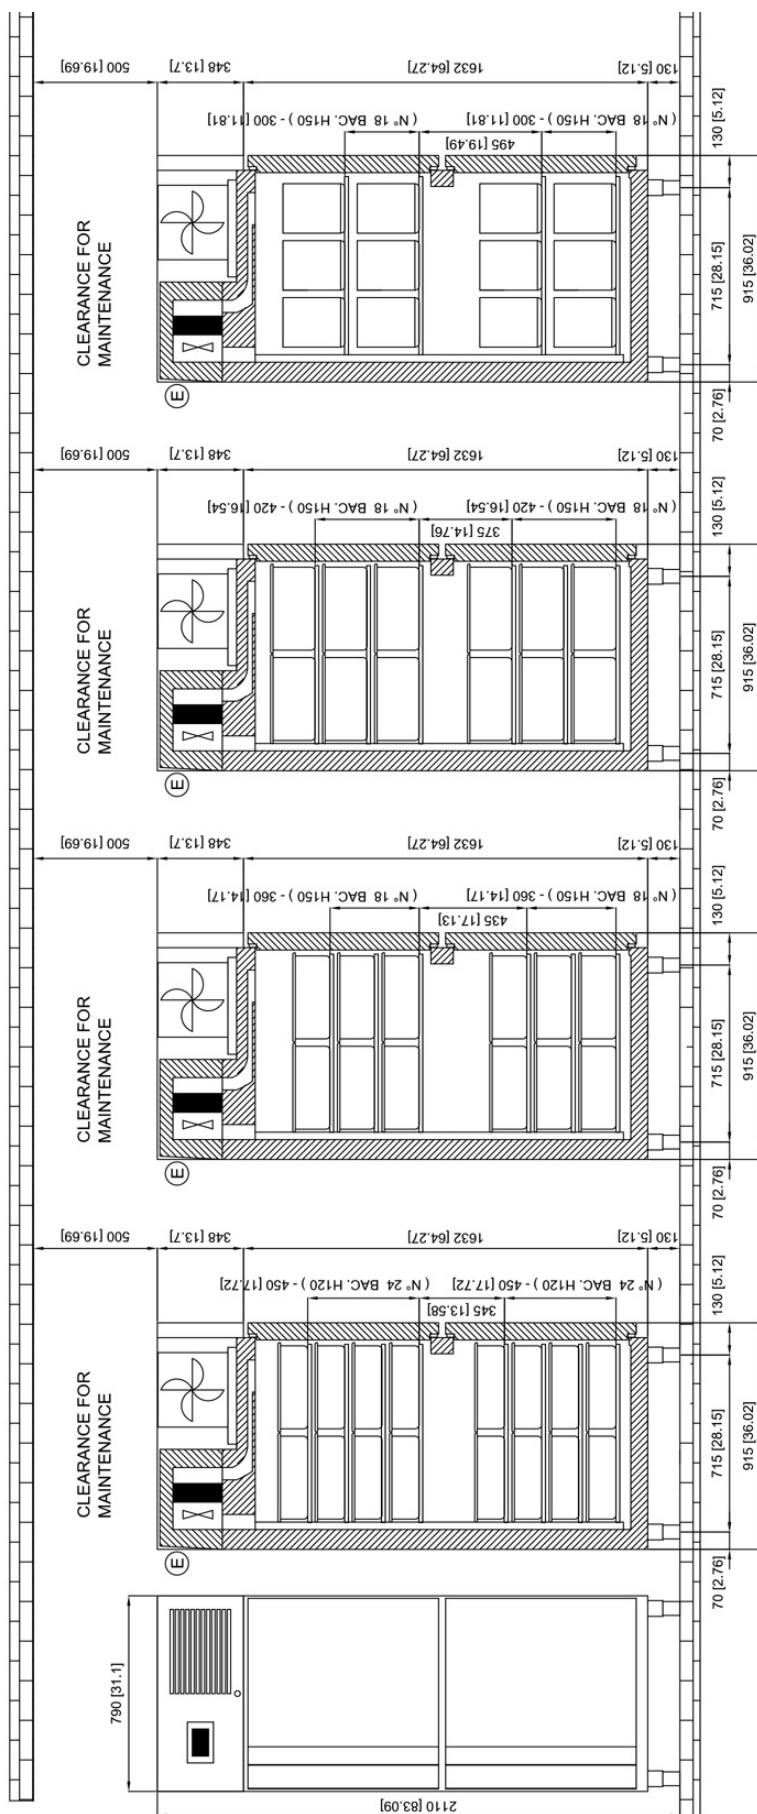

- ① INGRESSO REFRIGERANTE ø 6
- ② REFRIGERANT INLET ø 6
- ③ USCITA REFRIGERANTE ø 10
- ④ REFRIGERANT OUTLET ø 10
- ⑤ CONNESSIONE ELETTRICA
- ⑥ ELECTRICAL CONNECTION
- ⑦ CONNESSIONE SCARICO
- ⑧ DRAIN CONNECTION
- ⑨ CONNESSIONE INGRESSO H2O 1/2"
- ⑩ INLET WATER CONNECTION 1/2"
- ⑪ CONNESSIONE USCITA H2O 1/2"
- ⑫ EXHAUST WATER CONNECTION 1/2"
- DIMENSIONI mm
- DIMENSIONS [in]

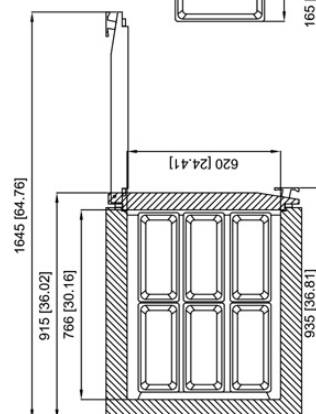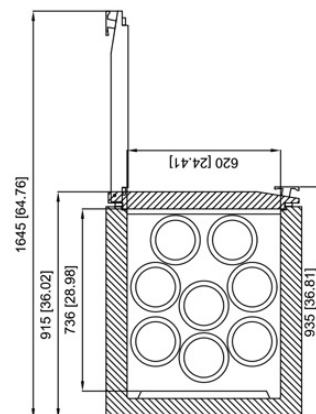

HIBER ALI Srl a Socio Unico

Via Treviso, 4 - 33083 Taiedo di Chions - PN - I

T +39 0438 911 940 - F +39 0438 911 991

info@hiber.it - hiber.it

**hiber**  
THE FUTURE OF CHILLING