




SNACK&FOOD

GELATO / GELATO




CARATTERISTICHE TECNICHE	OPTIONAL	TECHNICAL SPECIFICATIONS	OPTIONALS
- basamento in tubolare d'acciaio verniciato con polveri epossidiche a forno a 180°C con elementi di irrigidimento e piedini regolabili - struttura costruita in metallo, acciaio inox e lamiera zincata nelle parti non a vista, con poliuretano iniettato - la vasca accoglie una fila singola di vaschette con la possibilità di alloggiare una fila di riserva sotto quelle espositive, se alte 120 mm - il vetro frontale si apre dall'alto al basso - fianchi terminali in vetro montati direttamente sulla scocca - tetto in vetro fisso profondo 320 mm - illuminazione fluorescente - chiusura con pannelli scorrevoli in plexiglas - pannello comandi elettronico - refrigerazione ventilata con evaporatore verticale - vaschetta evapora condensa - sbrinamento a gas caldo o inversione di ciclo	- vaschette gelato 360x165 mm - lavaporzionatore - piano porta torte - unità condensatrice remota	- supporting structure in tubular steel frame painted with epoxy powder at 180°C, with stiffening elements and adjustable feet - structure made of stainless steel and zinc-coated sheet, with injected polyurethane - pans in a single row according to the provided module's length; it is possible to have another row beneath the 120 mm/4.72" high ones - the upper frame is made of self-supporting glass panels - the glass front opens downwards - glass end panels directly fixed on the structure - glass fixed top 320 mm / 12.59" in depth - fluorescent lighting - rear closure with sliding Plexiglas panels - electronic control panel - ventilated refrigeration system with vertical evaporator - condensate evaporation tray - hot gas or reverse cycle defrosting system	- gelato pans: 360x165 mm / 14.17"x6.5" - scoop washer - stainless steel cakes tray - remote condensing unit

SEZIONI SECTION VIEWS

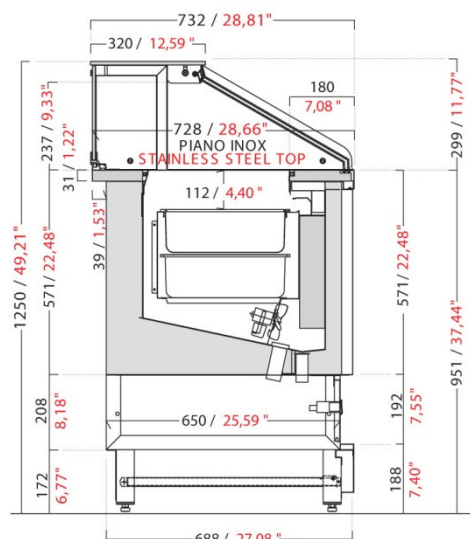

VBD - H 1250 mm / 49.21"

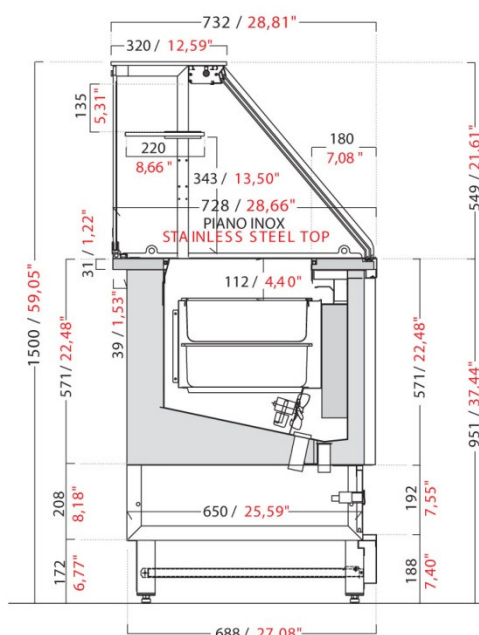

VAD - H 1500 mm / 59.05"

MODULI E VASCHETTE GELATO UNITS AND GELATO PAN LAYOUTS

	*1000 / *39.37"	*1500 / *59.05"	*2000 / *78.74"
360x165 14.2"x6.5"			
	5	8	11

*Misure senza fianchi (1 fianco in metallo "SLIM" - 3 mm; 1 fianco in legno - 20 mm)

*Side panels not included (1 metal side panel "SLIM" - 3 mm/0.11"; 1 wooden side panel - 20 mm/0.79")

CAPENZA VASCHETTE GELATO GELATO PAN CAPACITY

360x165 mm 14.17"x6.5"	H 120 mm / H 4.72" → 5 litri / 5 liters
	H 150 mm / H 5.91" → 7 litri / 7 liters

DIMENSIONI, IMBALLO E PESO DIMENSIONS, PACKAGING AND WEIGHT

MODELLO MODEL	LUNGHEZZA con 2 fianchi LENGTH with 2 end panels		PROFONDITÀ DEPTH		PESO WEIGHT		DIMENSIONE IMBALLO PACKAGING DIMENSIONS		PESO con imballo CRATED WEIGHT	
	mm	in	mm	in	kg	lb	mm	in	kg	lb
L 1000	*1000	*39.37"	732	28.81"	130	287	1124x911xH1367	44.3"x35.9"xH53.8"	167	368
L 1500	*1500	*59.05"	732	28.81"	170	375	1624x911xH1367	63.9"x35.9"xH53.8"	221	487
L 2000	*2000	*78.74"	732	28.81"	210	463	2124x911xH1367	83.6"x35.9"xH53.8"	274	604

*Misure senza fianchi (1 fianco in metallo "SLIM" - 3 mm; 1 fianco in legno - 20 mm)

*Side panels not included (1 metal side panel "SLIM" - 3 mm/0.11"; 1 wooden side panel - 20 mm/0.79")

DATI TECNICI TECHNICAL SPECIFICATIONS

	UC CON MOTORE A BORDO WITH BUILT-IN AIR-COOLED CONDENSING UNIT	TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY
		MONOFASE - V/Ph/Hz 230/1/50

MODELLO MODEL	POTENZA ASSORBITA CURRENT CONSUMPTION		RESA COOLING CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
	monofase 230/1/50		monofase 230/1/50		°C	°F	U.R. R.H.	°C	°F
	W	A	W	BTU/h					
			-30°C	-22°F					
L 1000	621	4.20	375	1281	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F
L 1500	720	3.51	470	1605	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F
L 2000	975	4.71	755	2578	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F

	CON MOTORE ENTRO 22 METRI WITH CONDENSING UNIT WITHIN 22 METERS	TENSIONE E FREQUENZA / VOLTAGE AND FREQUENCY
		MONOFASE - V/Ph/Hz 230/1/50

MODELLO MODEL	POTENZA ASSORBITA CURRENT CONSUMPTION		RESA COOLING CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
	monofase 230/1/50		monofase 230/1/50		°C	°F	U.R. R.H.	°C	°F
	W	A	W	BTU/h					
			-30°C	-22°F					
L 1000	649	3.07	470	1605	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F
L 1500	1025	5.13	755	2578	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F
L 2000	1261	6.85	919	3137	35°C	95°F	60%	-2°C;-18°C	+28.4°F; -0.4°F