

CARATTERISTICHE TECNICHE

Pensile con refrigerazione ventilata ed evaporatore con verniciatura protettiva, senza unità condensatrice (NUC), con illuminazione interna con LED 4000°K ad effetto luce naturale posta sul cappello. Schienale e ripiani in lamiera zincata verniciata a polveri RAL 7021 nero opaco, o in acciaio inox 301 Scotch-Brite. Pannello frontale superiore e inferiore in lamiera verniciata a polveri RAL 7021 nero opaco, optional in acciaio inox 301 Scotch-Brite o verniciata a campione. Fianchi terminali non inclusi, disponibili in:

- vetrocamera con serigrafia nera - spessore 30 mm;
- in acciaio inox 305 lucido - spessore 40 mm;
- verniciati RAL 7021 nero opaco o verniciati a campione - spessore 40 mm.

Versione CHIUSA con porte scorrevoli in vetrocamera. Una mensola interna profonda 350 mm per la versione H 945 mm, due mensole per la versione H 1185 mm.

Sbrinamento ventilato con arresto del compressore. Non canalizzabile. GUSTO è testato in classe climatica 3 (25°C/60% U.R.); classe di temperatura M2 (-1°C/+7°C).

Disponibile nei moduli lineari 937, 1250 e 1875 mm, con altezza H 945 o H 1185 mm.

TECHNICAL FEATURES

Wall unit with ventilated refrigeration, without condensing unit (NUC), with 4000°K LED lighting placed under the top. Back and shelves in galvanized metal sheet painted in epoxy powder RAL 7021 matt black, or in Scotch-Brite finish 301 stainless steel. Upper and lower front panel in metal sheet painted in epoxy powder RAL 7021 matt black, optional in Scotch-Brite finish 301 stainless steel or painted according to sample.

Sides available in:


- double glazing with black screen printing - 30 mm thick;
- polished 305 stainless steel - 40 mm thick;
- painted RAL 7021 matt black or painted according to sample - 40 mm thick.

CLOSED version with double-glazed sliding doors. One internal shelf 350 mm deep for the H 945 mm version, two shelves for the H 1185 mm version.

Ventilated defrost with compressor stop. Climatic class: 3 (25°C/60% R.H.); temperature class: M2 (-1°C/+7°C).

Available in linear modules 937, 1250 and 1875 mm, with height H 945 or H 1185 mm.

SEZIONI | SECTION VIEWS

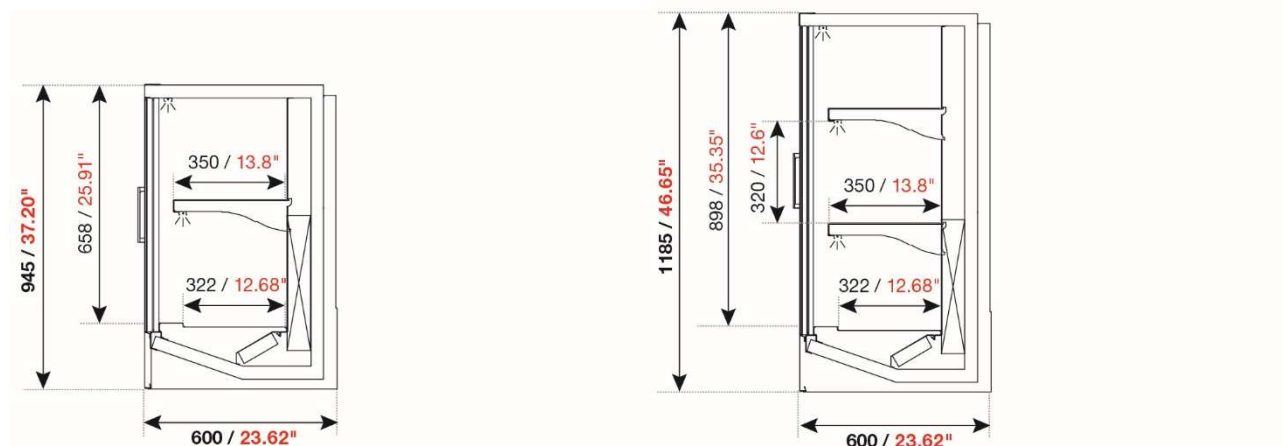




Gusto



Pensile Refrigerato chiuso Refrigerated wall unit

SHEMA SCARICHI | DRAINAGE SYSTEM SCHEME

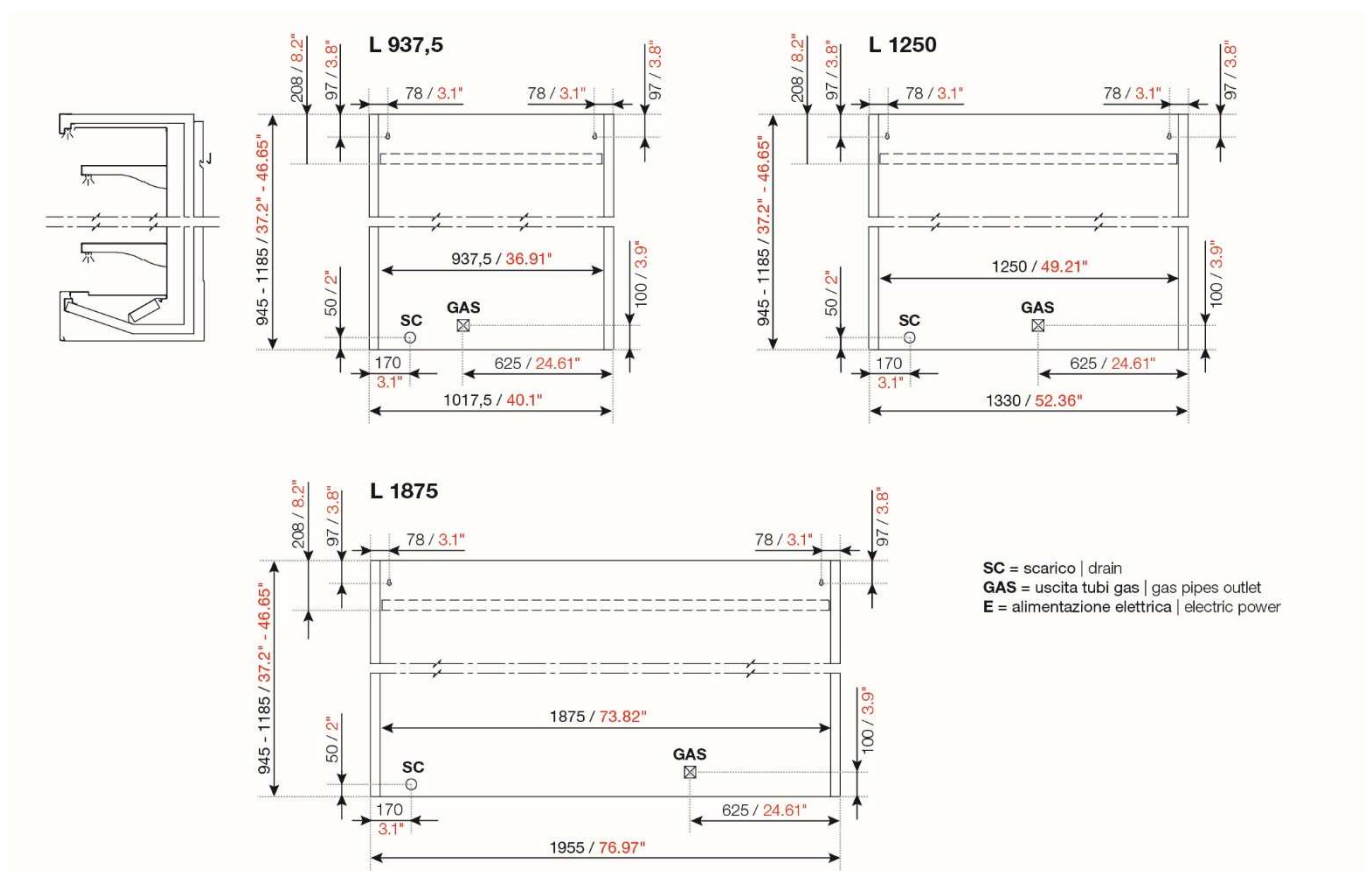

DIMENSIONI - PESO - IMBALLO | DIMENSIONS - WEIGHT - PACKAGING

Modello Unit	Lunghezza Length		Altezza Height		Profondità Depth		Peso Weight		Dimensioni imballo LxPxH Packaging dimensions LxDxH	
	mm	in	mm	in	mm	in	kg	lb	mm	in
L 937	1017*	40*	945	37.2	600	23.6"	125	276	1200x810xH1150	47.2"x31.8xH45.2"
L 937	1017*	40*	1185	46.6	600	23.6"	140	308	1200x810xH1350	47.2"x31.8xH53.1"
L 1250	1330*	52.4*	945	37.2	600	23.6"	150	331	1500x810xH1150	59"x31.8xH45.2"
L 1250	1330*	52.4*	1185	46.6	600	23.6"	170	375	1500x810xH1350	59"x31.8xH53.1"
L 1875	1955*	76.9*	945	37.2	600	23.6"	245	540	2100x810xH1150	82.6"x31.8xH45.2"
L 1875	1955*	76.9*	1185	46.6	600	23.6"	265	585	2100x810xH1350	82.6"x31.8xH53.1"

*Misura comprensiva di fianchi terminali | Length including sides





Gusto

Pensile Refrigerato chiuso Refrigerated wall unit



DATI TECNICI | TECHNICAL DATA

CLASSE CLIMATICA
CLIMATE CLASS

3 (30°C e 55% U.R.)

CLASSE DI TEMPERATURA
TEMPERATURE CLASS

M2 ($\geq -1^{\circ}\text{C}$ $\leq +7^{\circ}\text{C}$)

CLASSE DI EFFICIENZA ENERGETICA | ENERGY
EFFICIENCY CLASS

D

R452A

UC = MOTORE A BORDO | ON-BOARD CONDENSER
230V/1/50Hz

UCR = MOTORE REMOTO | REMOTE CONDENSER
230V/1/50Hz < 20 m



POTENZA ASSORBITA
CURRENT CONSUMPTION

W

A

RESA
COOLING CAPACITY

W/h -10°C

BTU/h +14°F

POTENZA ASSORBITA
CURRENT CONSUMPTION

W

A

RESA
COOLING CAPACITY

W/h -10°C

BTU/h +14°F

L 937

-

-

-

-

47

0,3

392

1338

L 1250

-

-

-

-

70

0,4

520

1775

L 1875

-

-

-

-

95

0,6

784

2676

